

Nivotemp 61-1-TKÖ-..RD-M3-VA

- Renault Specification -

Technical Data

Operating pressure max. 1 bar
 Operating temperature max. 80 °C
 Spec. gravity of float min. 0.8 kg/dm³

Material

Float SK 221 1.4571
 Switch tube 1.4571
 Flange PA
 Stilling tube 1.4571

Level contacts


K10
 Function NO
 Min. distance of contact 40 mm
 Max. Voltage 230 V
 Max. current 1.0 A
 Contact load 10 VA

Temperature contacts

Max. voltage 230 V
 Max. current 2.5 A
 Contact load 100 VA
 Hysteresis 10 K ± 3 K
 Switch point TKÖ-70 = 70 °C NC


Connector

M3 (3-pol. + PE)
 Protection class IP 65

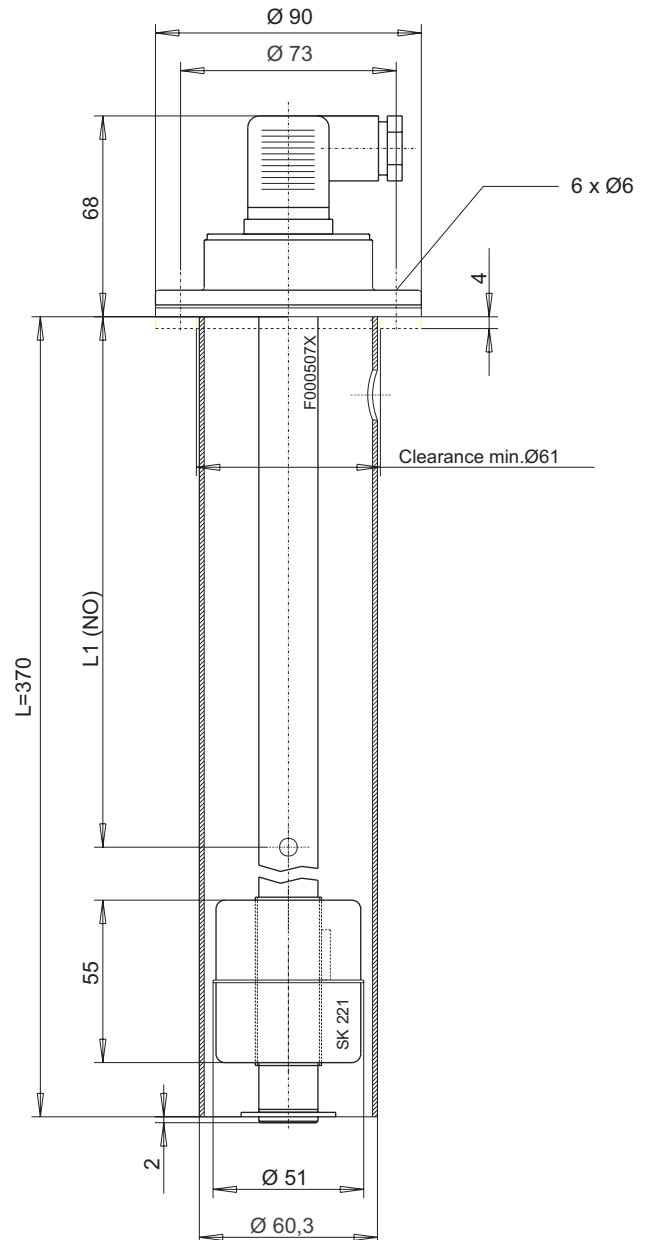

Wiring diagram

All figures at empty reservoir

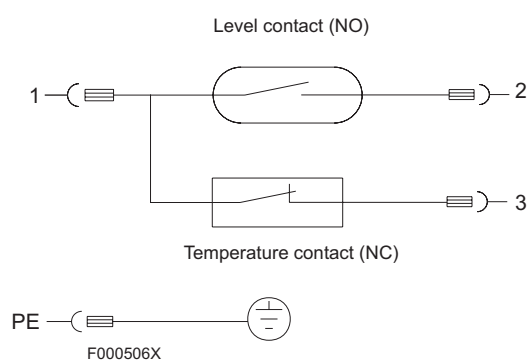

Order Information

Type	Part No.	L	L1	Temperature
61-1-TKÖ-70RD-M3-VA1	10208999	370 mm	200 mm NO	70 °C NC
61-1-TKÖ-70RD-M3-VA2	10218999	370 mm	300 mm NO	70 °C NC

we reserve the right to amend specifications

