

Pressure transmitter Pressotronik 702

Monitoring the oil pressure is essential in hydraulic systems and oil supply systems. It's important to monitor both process-related pressure ranges as well as safety shutdowns, load limits or simply to determine if the lubricating pressure is adequate.

The pressure transmitters must meet a variety of requirements with respect to their pressure resistance, signal output, programmability or the plug connection style. A local or status display is often required for safety reasons

The Pressotronik 702 pressure transmitters have a compact installation size, different connector plugs and fine-tuned pressure levels ranging from low-pressure to high pressure range.

Pressure ratings up to 600 bar

Compact and robust design

Stainless steel measuring cell

Pressure measuring cell welded seal-free with pressure sensor, no elastomer seal

High burst strength

2 plug connection options available



Technical Data Pressotronik 702

Pressure Transmitter Pressotronik 702

Pressure ranges	0 - 10 bar
	0 - 25 bar
	0 - 100 bar
	0 - 250 bar
	0 - 400 bar
	0 - 600 bar

Medium	Liquids, gasses and refrigerants, incl. ammonia
--------	---

Pressure connection	G1/4 male thread, DIN 3852 Form E with profile gasket FPM
---------------------	---

Overload	3 x limit at 10 to 600 bar
<i>higher values upon request</i>	(but max. 1500 bar)

Burst pressure	6 x terminal value (max. 2500 bar)
----------------	------------------------------------

Mounting position	any
-------------------	-----

Weight	approx. 90 g
--------	--------------

Material

Housing	1.4305
---------	--------

Connector holder	Polyarylamide 50 % GF VO
------------------	--------------------------

Materials in contact with media

Pressure connection	Stainless steel 1.4404 / AISI 316L
---------------------	------------------------------------

Measuring element	Stainless steel
-------------------	-----------------

Temperature

Medium	-30 °C to +135 °C
--------	-------------------

Ambient temperature	-30 °C to +85 °C
---------------------	------------------

Storage	-50 °C to +100 °C
---------	-------------------

Electrical data

Response time	<= 2 ms / typical 1 ms
---------------	------------------------

Load cycle	<= 100 Hz
------------	-----------

Supply voltage (U _b)	7 - 33 V DC
----------------------------------	-------------

Power input	<= 23 mA
-------------	----------

Output signal	4 - 20 mA, 2 wire
---------------	-------------------

Load Ω	= (U _b -7 V) / 0.02 A
--------	----------------------------------

Reverse polarity safety	Short circuit and reverse polarity safety (each connection to each with max. voltage)
-------------------------	---

Connection	M3 (IP 65)
<i>other versions on request</i>	M12 (IP 67) / Delivered without connector head

Accuracy (test conditions: 25 °C, 45 % RH, supply 24 VDC)

Characteristic*	± 0.3 % FS
-----------------	------------

Resolution	0.1 % FS
------------	----------

Thermal behaviour**	± 0.2 % FS/10K
---------------------	----------------



Long-term stability (1 year) per IEC 61298-2	± 0.25 % FS
--	-------------

*Typical; max. 0.5 % FS, ** -15 °C to +85 °C


Certificates/Approvals

Electromagnetic compatibility	CE compliant per EN 61326-2-3
Shock per IEC 60068-2-27	100 g, 11 ms, half-sine curve, all 6 directions, free fall from 1 m onto concrete (6x)
Continuous shock per IEC 60068-2-29	40 g over 6 ms, 1000x all 3 directions
Vibration per IEC 60068-2-6	20 g, 15...2000 Hz, 15...25 Hz with amplitude ± 15 mm, 1 octave/minute all 3 directions, 50 continuous loads

Dimensions

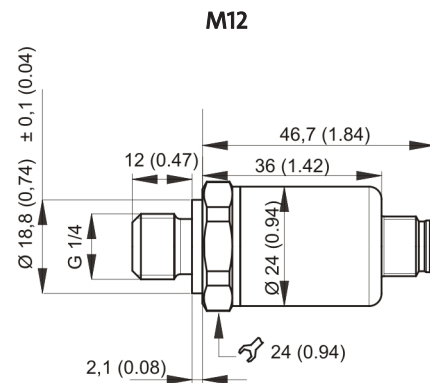
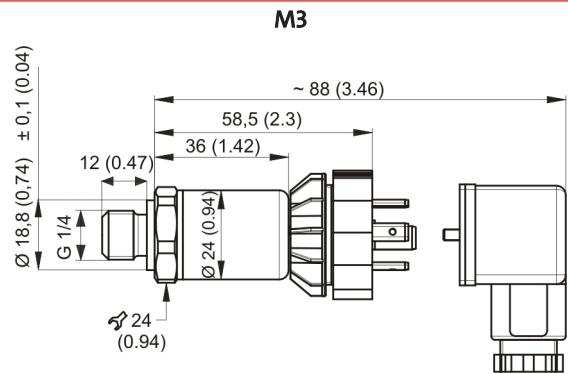


Ordering instructions Pressotronik 702

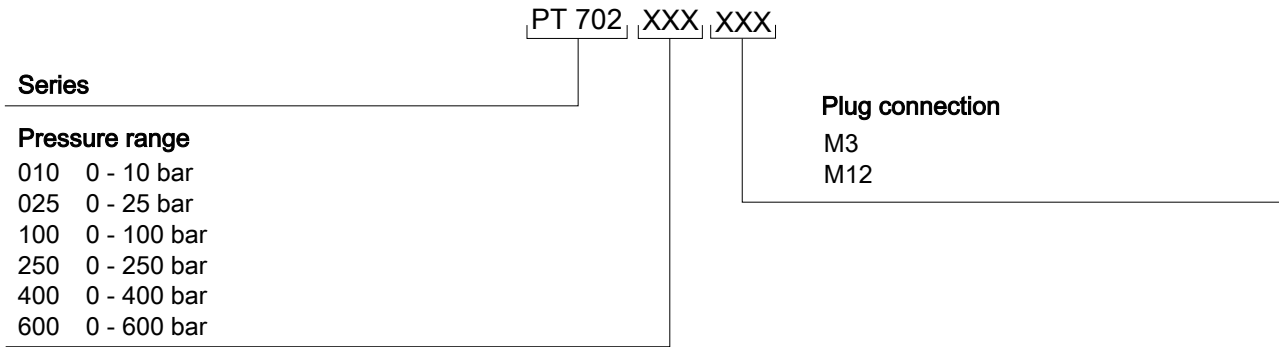

Item no.	Description
9144050010	Connecting cable M12x1, 1.5 m, angled coupler and straight plug
9144050046	Connecting cable M12x1, 3.0 m, angled coupler and straight plug
9144050047	Connecting cable M12x1, 5.0 m, angled coupler and strands

Standard pin assignment Pressotronik 702

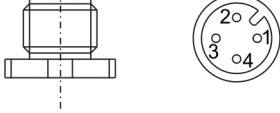	M3 valve connector 3-pin + PE DIN EN 175301-803-A IP65	M12 plug A coded 4-pin DIN EN 61076-2-101 IP67
Plug connection		
Pin assignment 2 lead	<ul style="list-style-type: none"> — 1 +24 V DC — 2 4-20 mA out — 3 — PE* 	<ul style="list-style-type: none"> — 1 +24 V DC — 2 — 3 4-20 mA out — 4

* not connected to transmitter housing.