

9 Appendices


9.1 Technical Data

Gas Probe Technical Data


Probe operating temperature:	max. 200 °C	
Ambient temperature without accessories:	-20 to +70 °C	
Ambient temperature with accessories:	Component	Ambient temperature range
	Compressed air valve:	-10 °C < T _{amb} < +55 °C
	Pneumatic drive:	-20 °C < T _{amb} < +80 °C
	Limit switch:	-20 °C < T _{amb} < +100 °C
	Solenoid valve for pneumatic drive:	-10 °C < T _{amb} < +55 °C
Medium temperature (blowback):	Component	Medium temperature range
	Compressed air valve:	-10 °C to +80 °C
	Solenoid valve for pneumatic drive:	-10 °C to +100 °C
Regulator setting range:	+50 to +200 °C	
Low/high temperature alarm:	Alarm adjustable ±5.....30 K from setpoint, factory preset to 15 K, max. switching current 1 A	
Electrical data:	230 V, 2.0 A, 50/60 Hz 115 V, 3.8 A, 50/60 Hz	
Protection class:	IP54	
Max. operating pressure:	6 bar	
Materials in contact with media		
Flange:	Stainless steel 1.4571	
Probe body:	Stainless steel 1.4571	
Ball valve:	Stainless steel 1.4408/1.4462/PTFE	
Seal:	Stainless steel 1.4404/graphite/and see filter Optional coating with SilcoNert® 2000 *	

*The SilcoNert® 2000 coating forms a layer of hydrogenated, amorphous silicon on the surfaces of the measuring gas probe that are in contact with media. It is applied by chemical vapour deposition (CVD), which creates a uniformly thin layer on the surface. SilcoNert® 2000 is temperature-resistant up to 400 °C, chemically inert and hydrophobic. The coating is resistant to many chemically corrosive liquids. If you are unsure about the suitability for specific gas matrices, please contact Bühler Technologies GmbH.

9.2 Flow chart

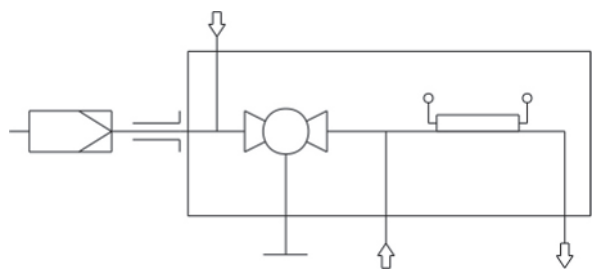

9.5 Connection Diagram

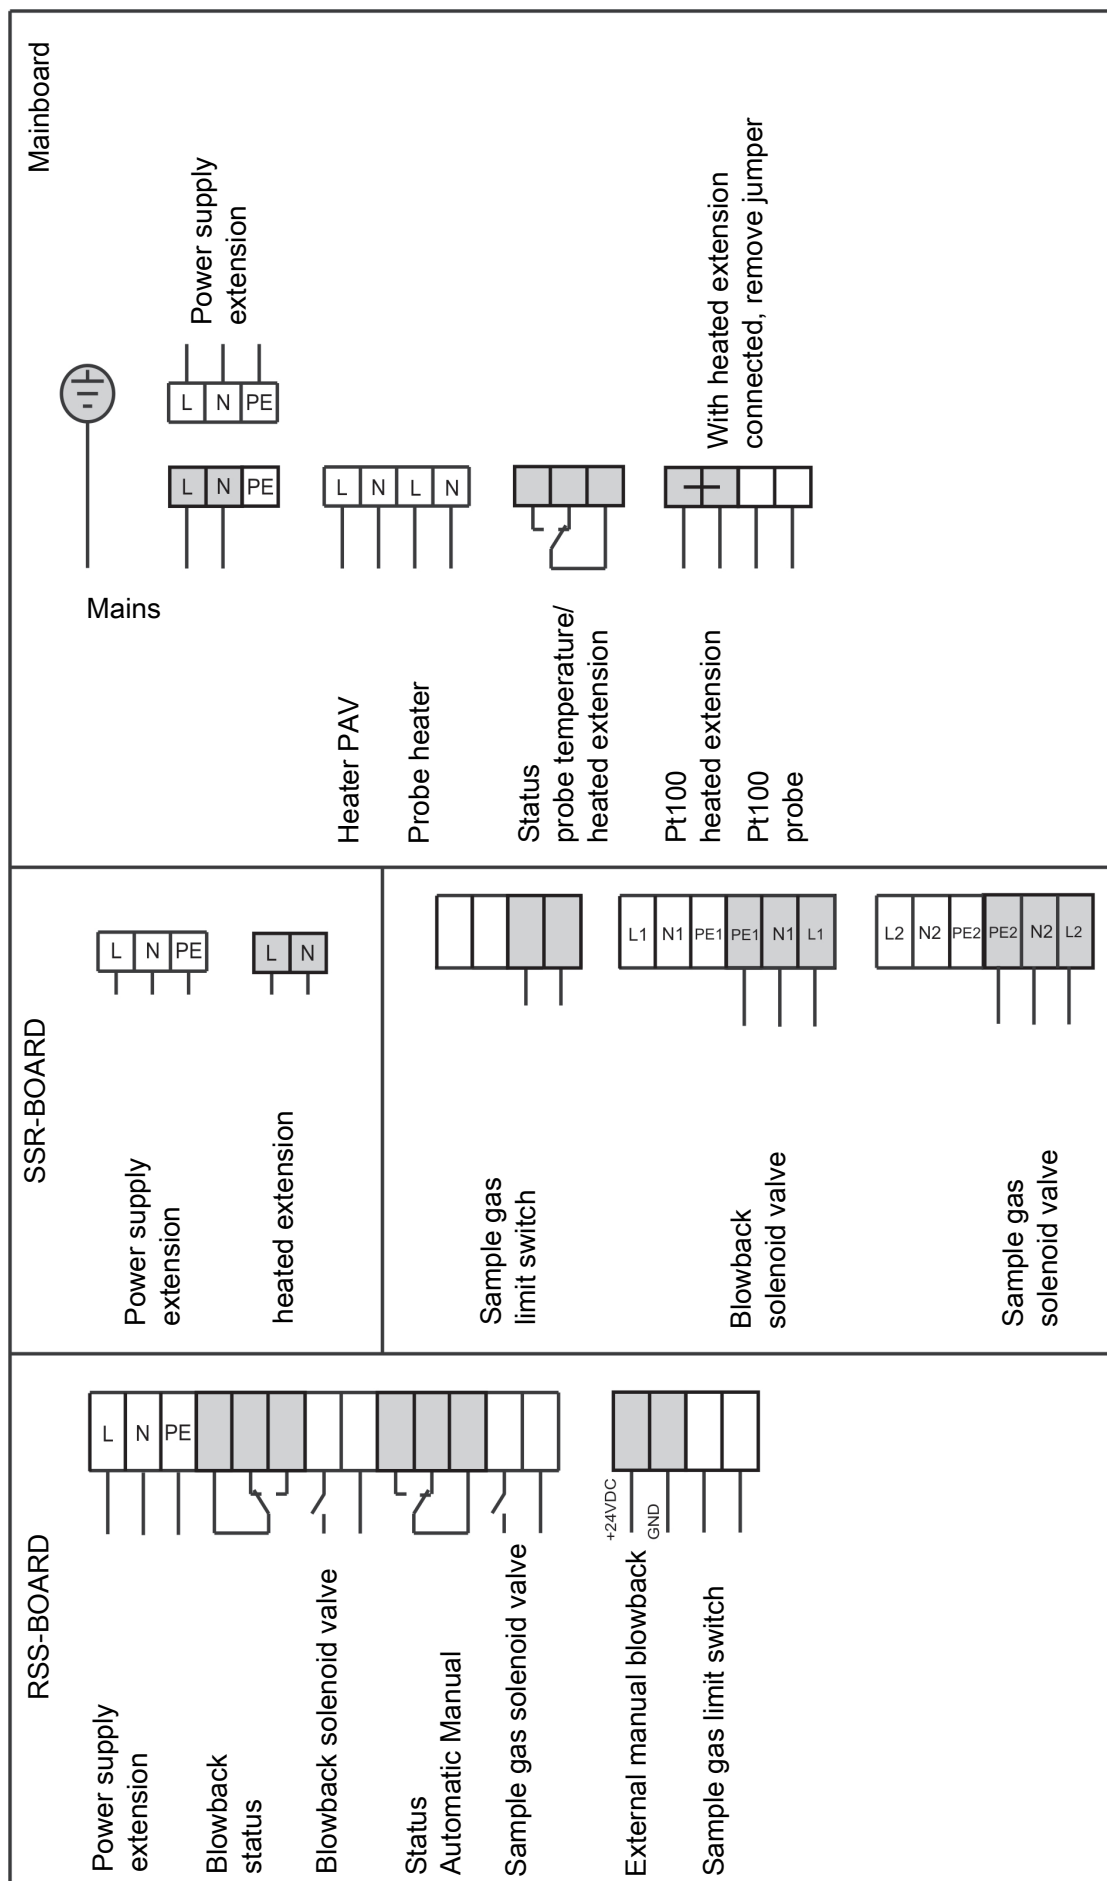


9.6 Connection diagram heated pressure vessel

Heater

Operating voltage

115-230 V AC 200 W



9.7 User book (Please make copies)