

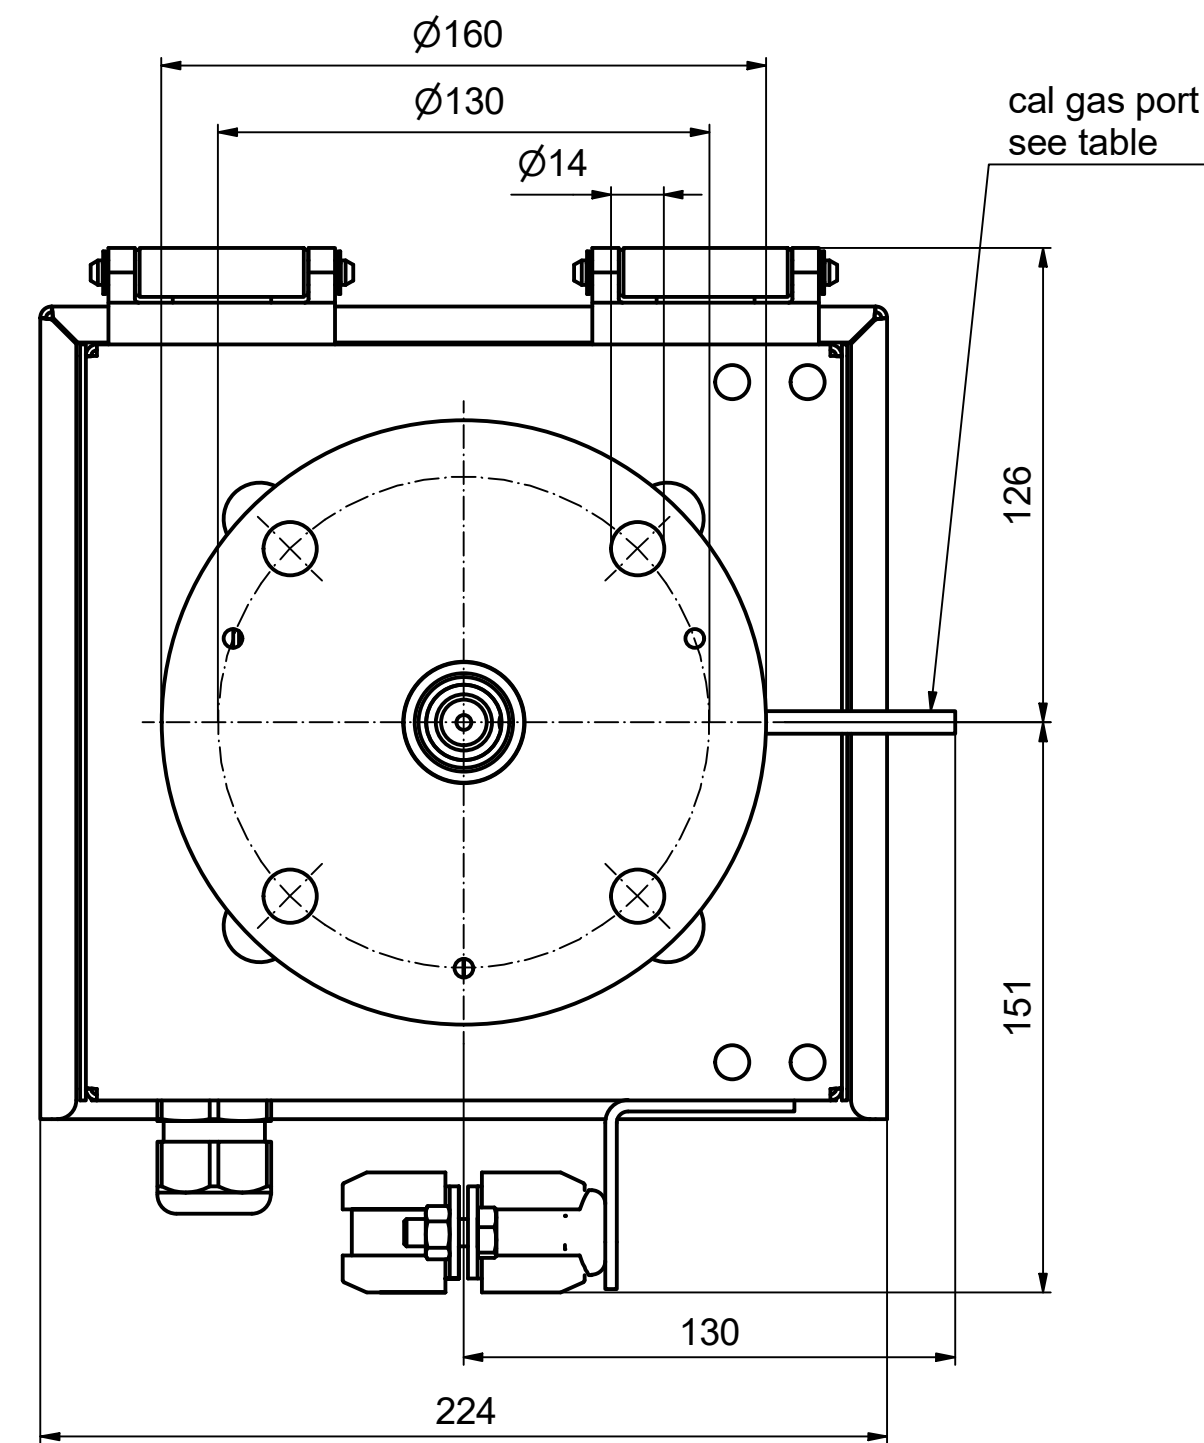
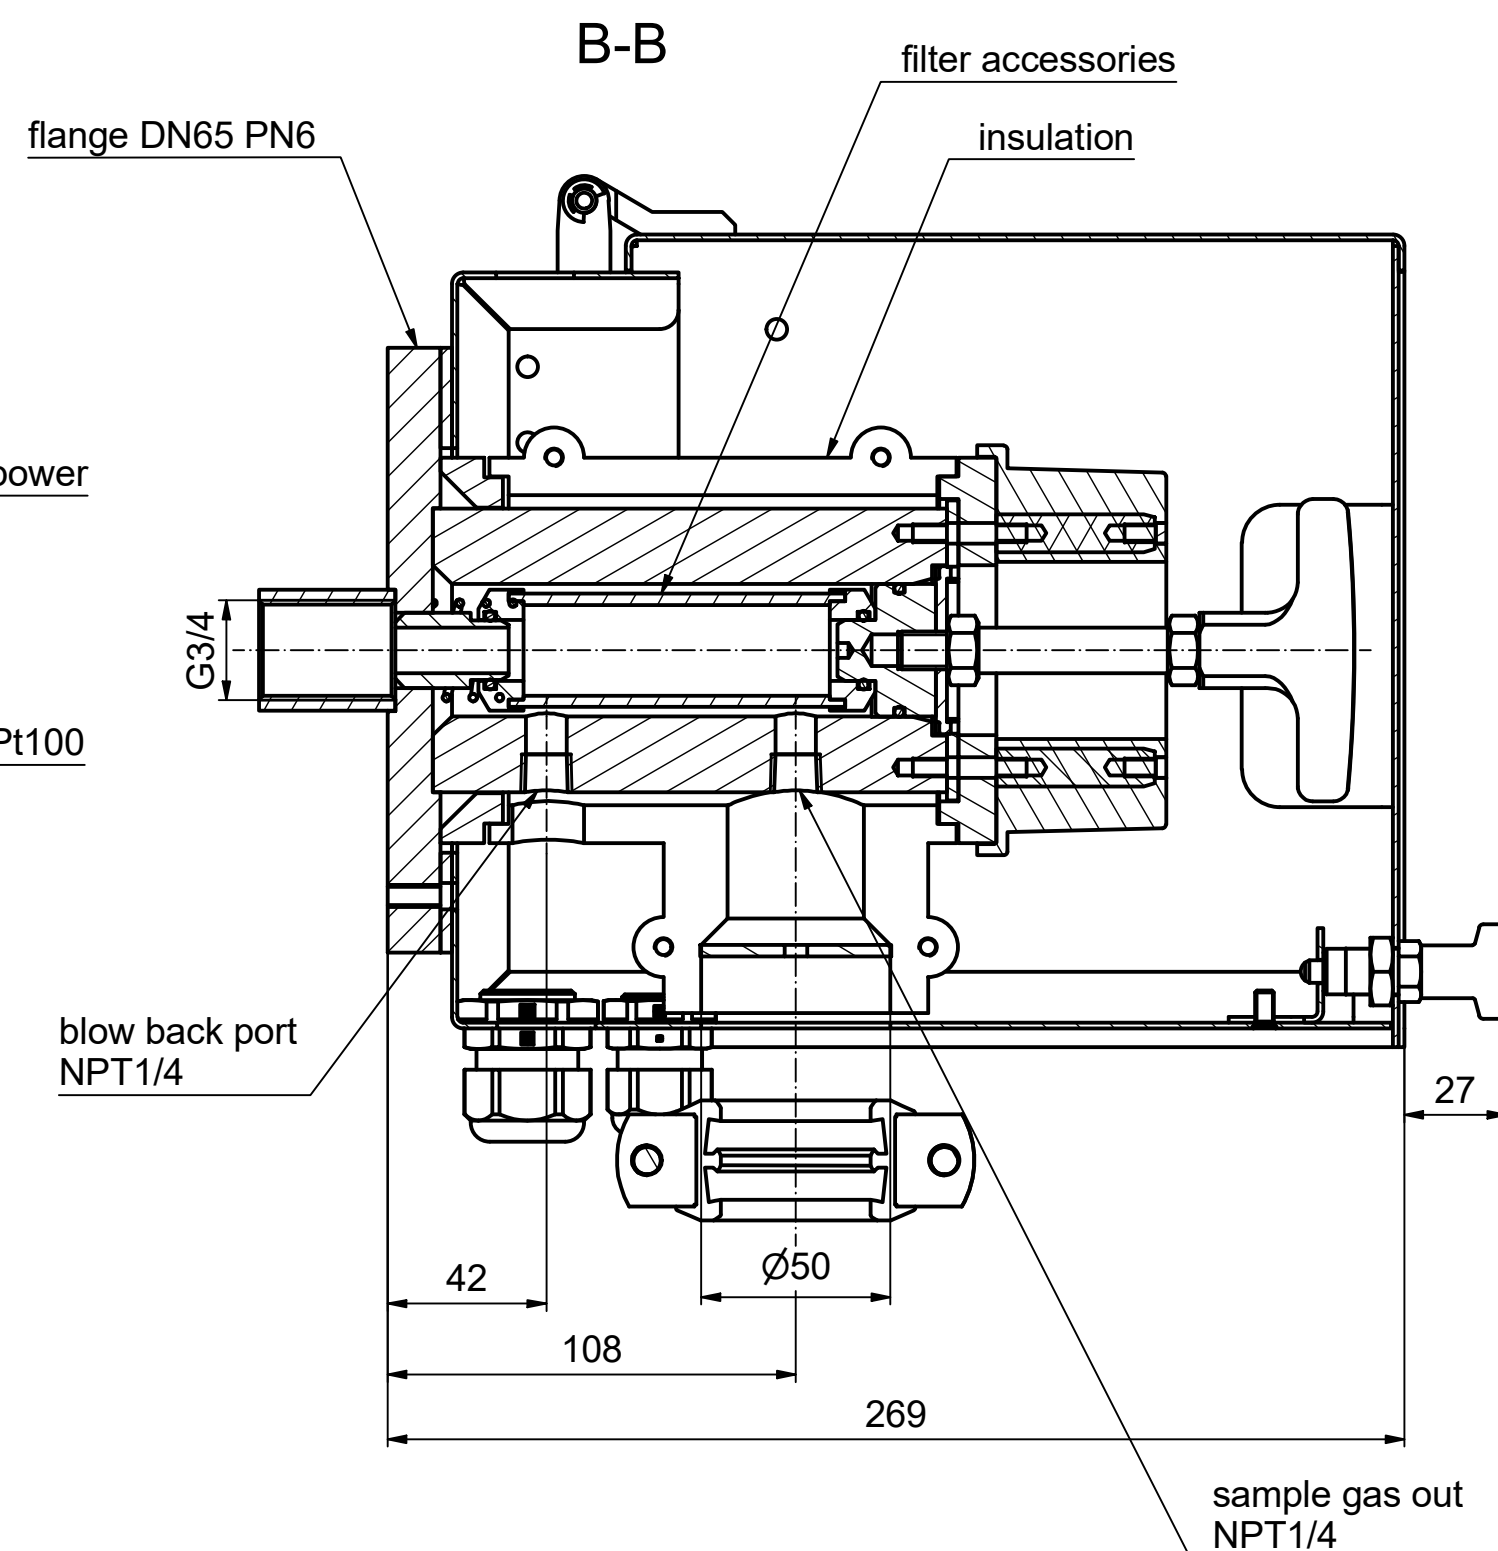
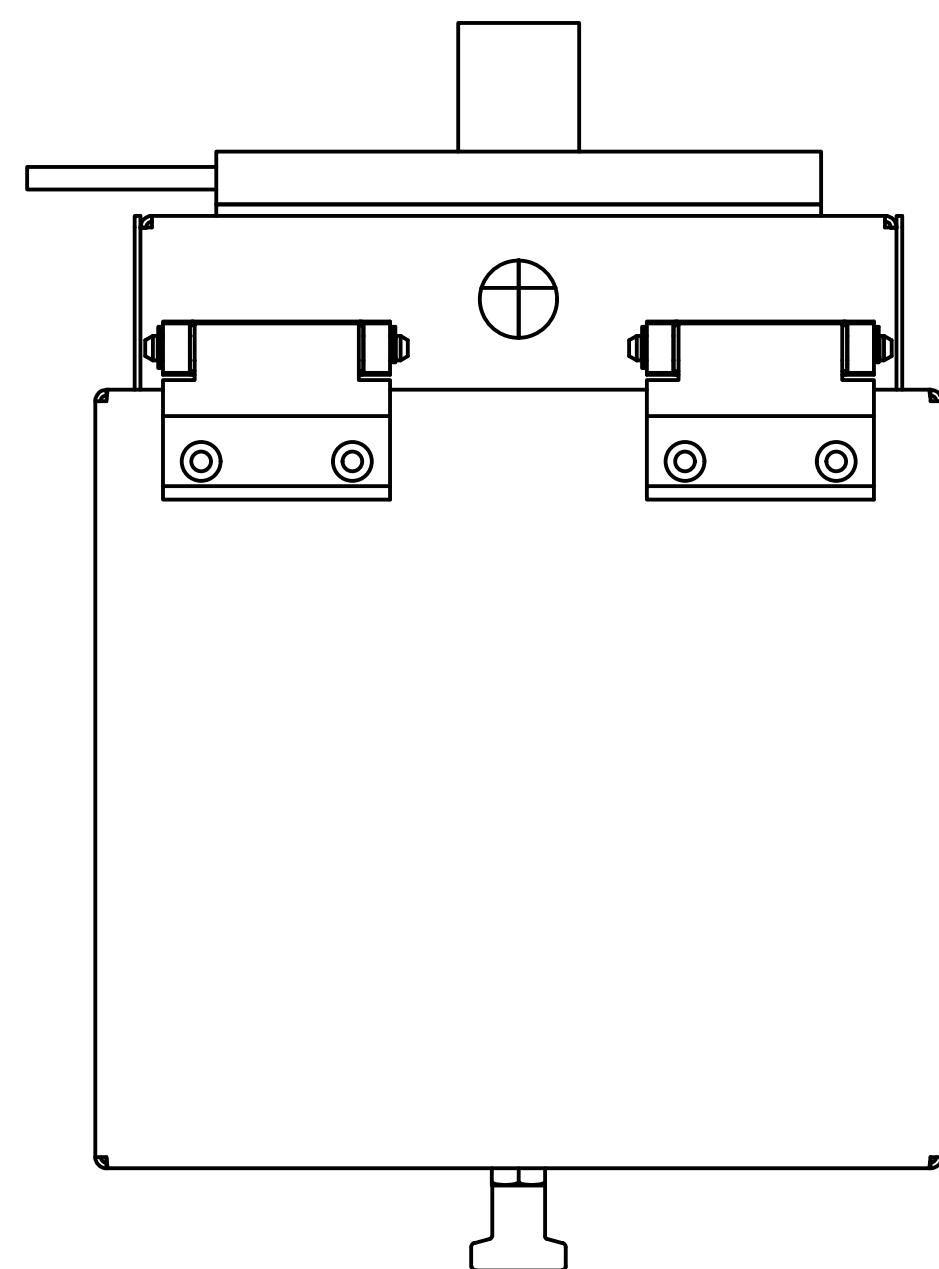


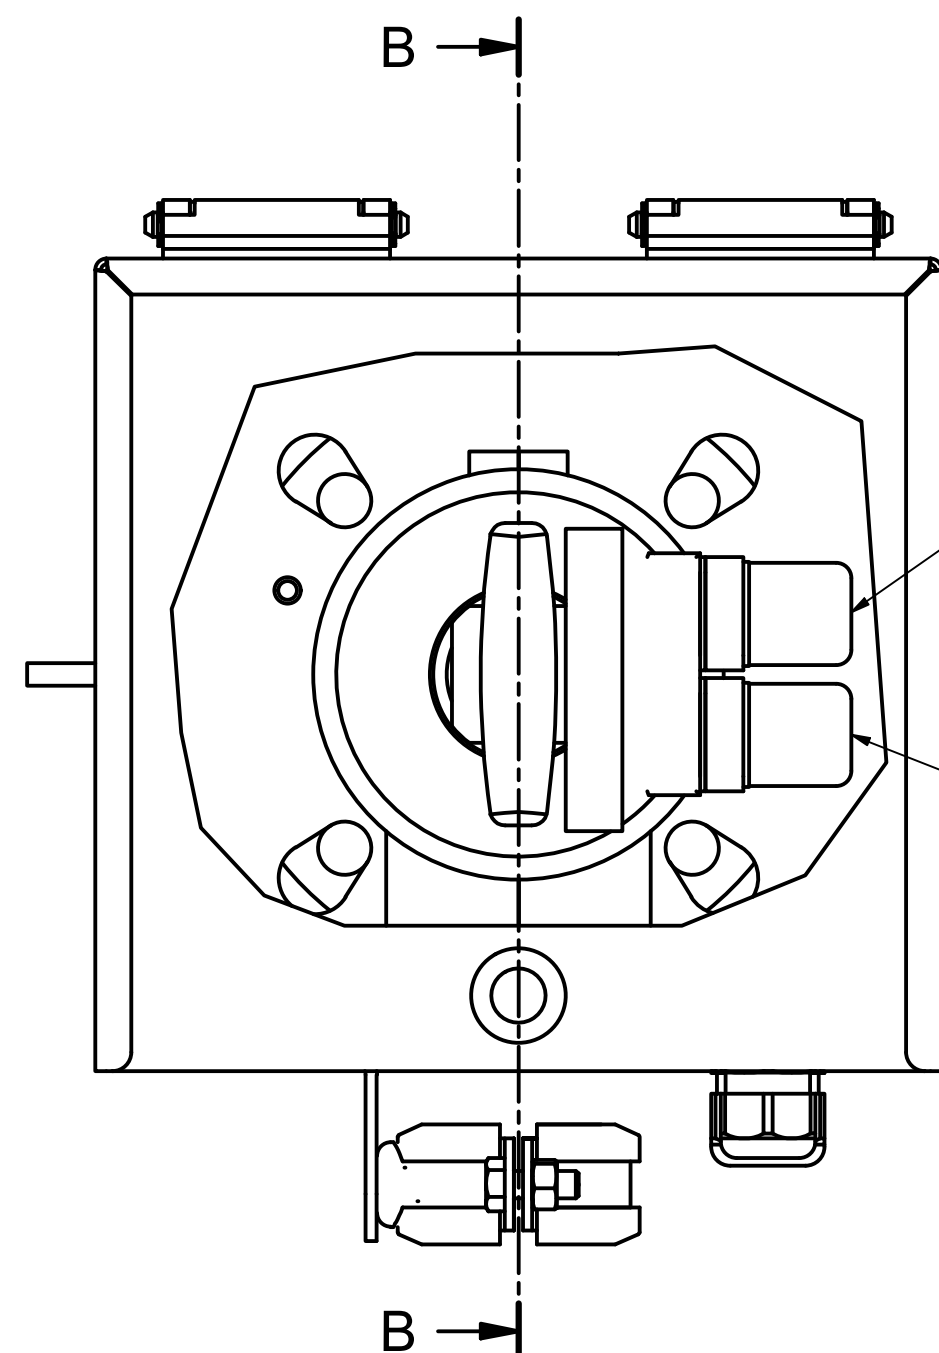

② connecting diagram

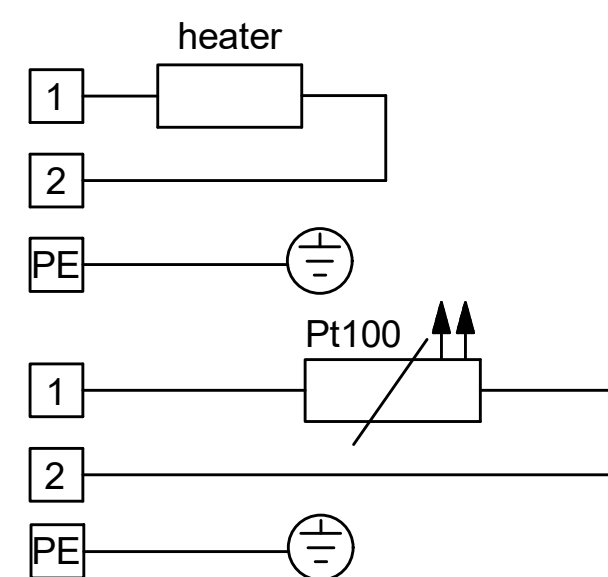

①		
item number	4622217LC003	4622217LC004
materials	1.4571 / SS316Ti	1.4571 / SS316Ti
operating temperature	max. 200°C / 392°F	max. 200°C / 392°F
heater	115-230VAC 400W	115-230VAC 400W
temperature self-regulating	180°C	180°C
ambient temperature	-20 ... +80°C	-20 ... +80°C
cal gas port	Ø6	none

Alle Kanten gratfrei	Alle Rechte vorbehalten	Maße ohne Toleranzangabe nach ISO 2768-mK		Maßstab: 1:2	Masse:
		Datum: 10.07.2018 Gepr.: 12.04.2021		Werkstoff:	
✓ = √Rz 63				Benennung: sample gas probe GAS 222.17-LC-PT100 GAS 222.17-LC-PT100-CAL	
✓ = √Rz 16					
✓ = √Rz 4				ZeichnungsNr.: 46/N53-Z01-01-2B	
				Art.Nr.:	
				Arbeitsanweisung:	